


## INSTALLATION INSTRUCTIONS



- Clean the dryer top surface properly before installation.
- Align the dryer exhaust with the lint trap collar and mark the lint trap position on the top of the dryer.
- Fix double sided foam tape (not supplied) on the bottom surface of the lint trap.
- Remove the remaining side of the foam tape strips and install the lint trap on the dryer top surface as marked.
- Apply some force downwards on the lint trap to hold it firmly.
- Connect duct to inlet and outlet collar.
- Always use solid metal pipe.
- Installation of the lint trap must be done by a qualified person and be in accordance with all municipal and national codes and standards.

**IMPORTANT: CLEAN LINT TRAP BEFORE EVERY DRYER CYCLE**

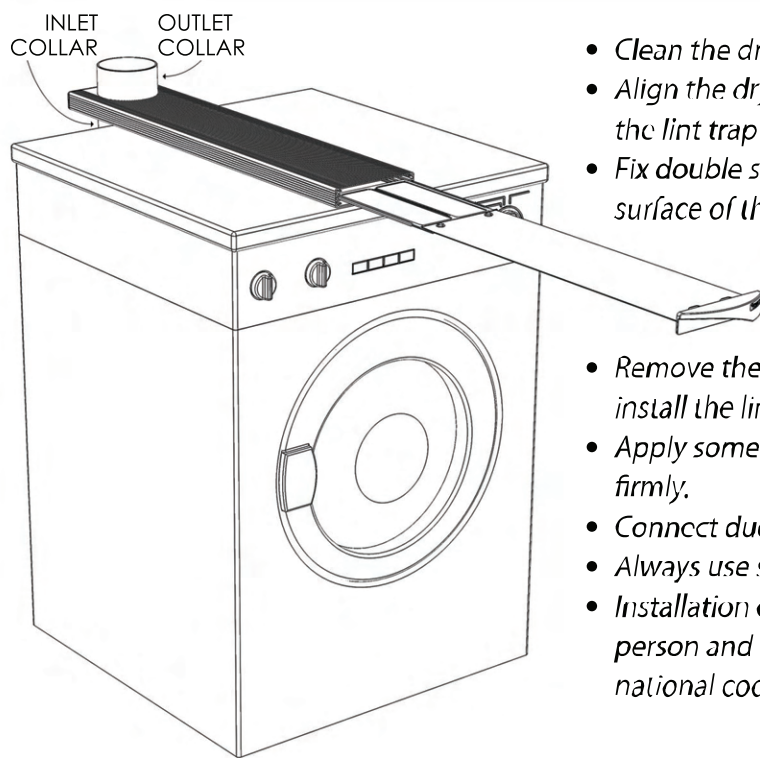

2480 Boul. des Entreprises Terrebonne, Quebec J6X 4J8 CANADA  
 T: 450.477.1100 F: 514.313.5700 TF: 1.800.489.1301  
 WWW.ATMOSPHERE.COM

FEBRUARY 2020

Customer support : info@atmosphere.com  
 Sales inquiries : sales@atmosphere.com



Panasonic is the exclusive distributor of  
 Atmosphere products in the US

Panasonic IAQ Division  
 Two Riverfront Plaza  
 Newark, NJ 07102  
 na.panasonic.com/us/iaq

For Order Information  
 PHONE: 866-292-7299  
 FAX: 888-553-0723  
 ventfans@us.panasonic.com

Design and specifications subject to change without notice.